




### APPLICATIONS:

APPLIANCE | ELECTRICAL | HVAC/R | MARINE | POOL & SPA | RV

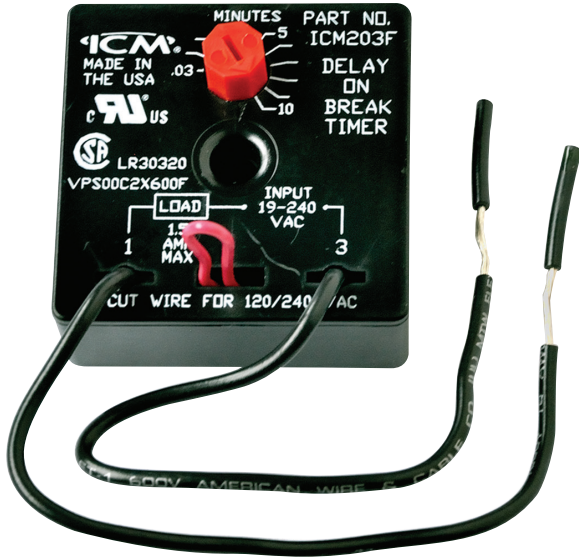

### OVERVIEW

Upon application of power, the load is energized. When the thermostat or other switch opens or there is a loss of power, the load is de-energized and the delay period begins. The compressor will not start again during the delay period. Restart occurs after the delay period has elapsed.

### REPLACES

- Supco: TD73W
- Wagner/DiversiTech: ADB-2

### FEATURES

- ✓ Universal voltage operation
- ✓ Higher 1.5 amp power rating
- ✓ Compressor lockout/anti-short cycle timer
- ✓ Helps to protect compressors from damage caused by rapid short cycling
- ✓ Simple, 2-wire hookup
- ✓ 6" wire leads

### SPECIFICATIONS

- **Voltage:** 18-240 VAC, 1.5 amps, 15 amp inrush
- **Frequency:** 50/60 Hz
- **Knob-adjustable delays:** .03-10 minimum (1.8-600 seconds)
- **Voltage drop:** 3.5 V typical, 4.5 V maximum @ 1.5 amps
- **Holding current minimum:** 40 mA