




Scan to see a full specifications, installation and agency certification information.

### APPLICATIONS:

APPLIANCE | ELECTRICAL | HVAC/R | MARINE | POOL & SPA | RV

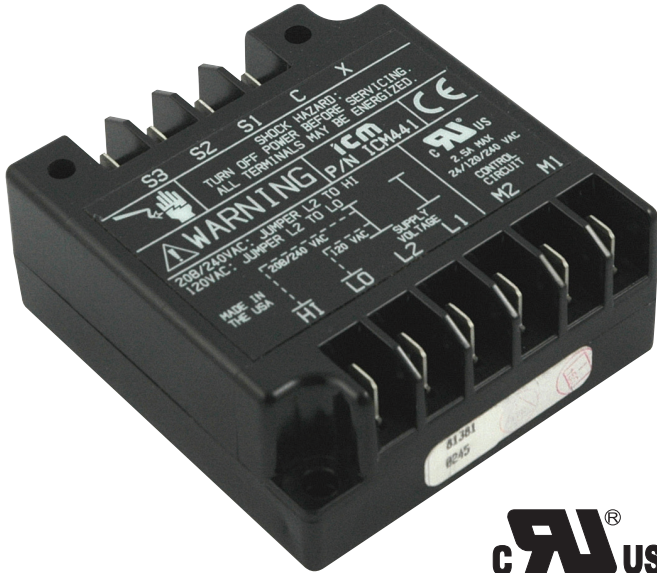

### REPLACES

- **Bristol:** 241680
- **Copeland:** 071-0376-01, 071-0376-02, 071-0397-00, 071-0397-01, 071-0424-00, 071-0424-01, 071-9800-00, 071-9800-01
- **Mars:** 37300, 37302, 37304, 37306, 37322
- **Texas Instruments:** 15AA1600 B, 15AA1600 C, 15AA1603 B, 15AA1603 C, 31AA1600 E, 31AA1606 E

### FEATURES

- ✓ Protects Against:
  - Under voltage
  - Over temperature
  - Power interruptions
  - Rapid short cycling
- ✓ Shorted temperature sensor
- ✓ Open temperature sensor
- ✓ Control duty, SPST relay layout
- ✓ Anti-short cycle time delay, 4 minutes (nominal)
- ✓ 1-second manual bypass

### SPECIFICATIONS

- **Voltage:** 120 or 208/240 VAC
- **Output:**
  - Relay: SPST
  - N.O.: 6 amps resistive
- **Time delays:**
  - Anti-short cycle time delay: 4 minutes (nominal)

Content and specifications on sell sheets subject to change without notice.