



# 18-240 VAC/VDC, 2-Wire Compressor Staging/ Startup Delay Timer

# ICM 105 DELAY ON MAKE

## MPS00C

- Knob adjustable from .03-10 minutes
- Simple 2-wire hookup for non-anticipator type systems

### MODE OF OPERATION

When power is applied to the input, the time delay begins. After the time delay is complete, the load energizes and remains energized as long as power is applied. The control is reset by removing power during or after the time delay period.

### SPECIFICATIONS

#### Input

- **Voltage:** 18-240 VAC/VDC
- **Frequency:** 50-60 Hz

#### Output

- **Output Ratings:**
  - **Maximum:** 1.5 amps
  - **Minimum:** 10 mA
  - **Inrush:** 15 amps


#### Time Delay

- .03-10 minutes adjustable

### INSTALLATION

1. Disconnect power.
2. Connect terminals in series with the starting device as shown in the wiring diagram below.
3. Select the desired time delay.
4. Reapply power, check operation.

### TIMING DIAGRAM

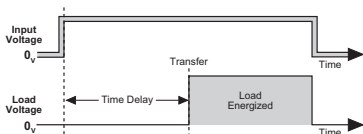

### WIRING DIAGRAM

