

ICM493 Surge Protection

before you buy – see a side by side comparison

Protects against:




ICM493

- Ideal for mini-splits or other condensing units
- Easy to view, back lit digital display
- Bank of five L-L surge arresters
- Built-in 40A contactor
- Easy installation and setup
- NEMA Type 3R rated metal enclosure



Intermatic CD1-024R

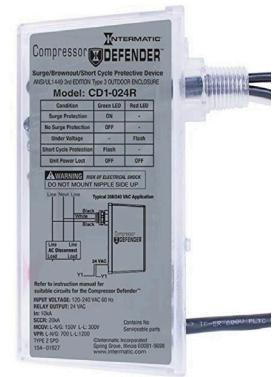

Feature	ICM Offers	Intermatic Offers
Input Voltage	208/240 Single phase	120/208/240VAC
Surge protection	Thermally protected MOV	Thermally protected MOV
Voltage Protection	5-10% adjustable over & under voltage protection	Fixed 13% under-voltage (brown out) protection
Voltage fault response time	6 line cycles	5 line cycles
Display voltage reading	Display calibrated to RMS voltage	None
Display	Monochrome LCD back lit display	None
Fault History Record	5 fault memory	None
Anti-Short Cycle Protection	Adjustable .05-10 minutes	Fixed 3 minutes
Enclosure	NEMA Type 3R Metal (disconnect box style)	Type 3 outdoor plastic
Reset	Auto reset or # of trials	N/A
Connected Equipment Warranty	Limited Lifetime 3 Yr/ \$10,000	3 Yr/\$7,500
Line Voltage Connection	In-line	Parallel to line
Fault condition Disconnect	40 amp contactor disconnects the main line	2 amp control relay
Operating Temperature	-40°F to 167°F (-40°C to 75°C)	-40°F to 158°F (-40°C to 70°C)
Made in the USA	Yes	No



800.365.5525
www.icmcontrols.com

