




Scan to see a full specifications, installation and agency certification information.

APPLICATIONS:

APPLIANCE | ELECTRICAL | HVAC/R | MARINE | POOL & SPA | RV

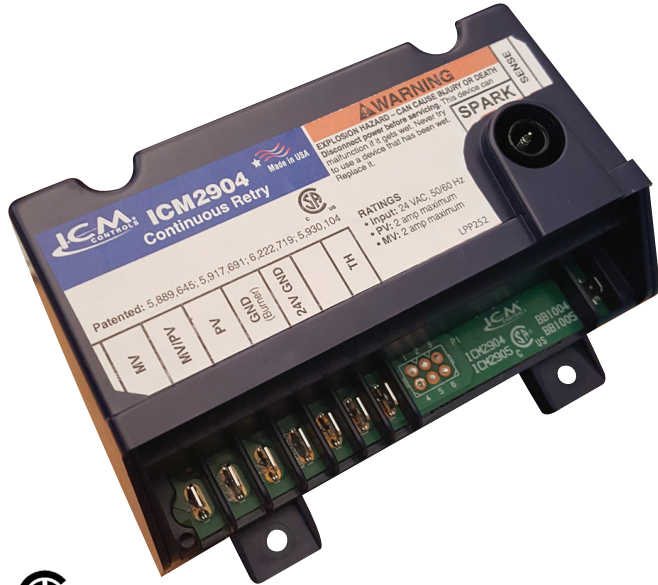

C US
1828910

REPLACES

- Reznor: 257009

FEATURES

- ✓ Low cost, direct replacement ignition control
- ✓ Intermittent pilot gas ignition control module
- ✓ For use with intermittent pilot boilers, furnaces and other heating appliances
- ✓ Microprocessor-based
- ✓ Remote flame sensing
- ✓ Compatible with LP or natural gas
- ✓ Brown out monitoring circuit

SPECIFICATIONS

- **Control voltage:** 18-30 VAC
- **Frequency:** 50/60 Hz
- **Pilot valve:** 2A @ 24 VAC
- **Main gas valve:** 2A @ 24 VAC
- **Current draw:** 100mA maximum
- **Pre-purge delay:** 0 seconds
- **Operating temperature:** -40°F to 167°F (-40°C to 75°C)
- **Humidity:** 5%-95% R.H. (non-condensing) at +55°C

Content and specifications on sell sheets subject to change without notice.